


Survey of Section 36. T. 8 R. 1 W

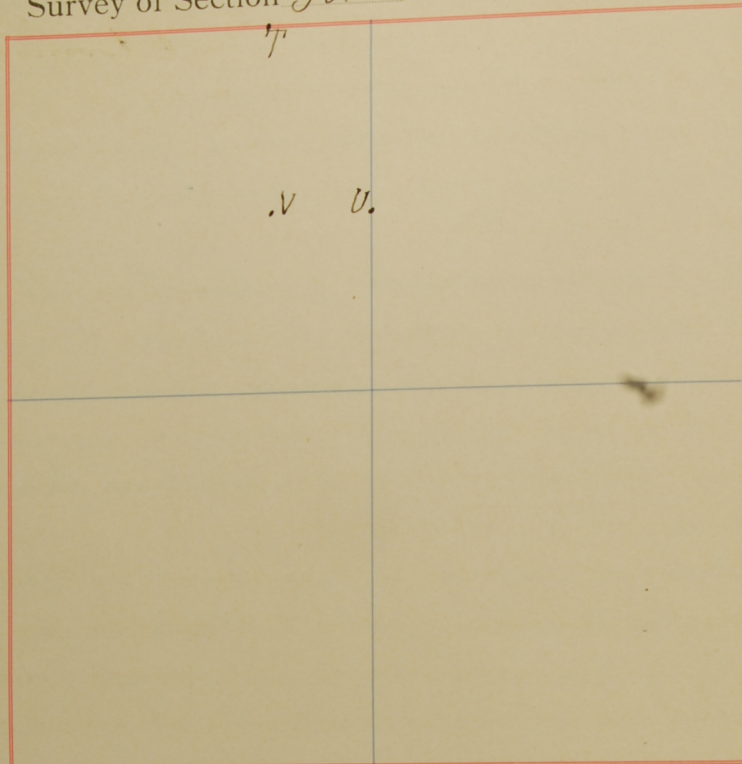

FIELD NOTES.

	Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	Beech	7	N 39° W	20				
	Beech	3	S 27° E	25½				
B	Oak	5	S 14° E	9				
	Oak	4	S 13½° W	10½				
C	Oak	5	S 83½° E	7				
	Oak	4	N 36½° E	12½				
D	Oak	2	N 1½° E	14½				
E								
F								
G								
H								

2000 ft. of the survey from  
at the point of the  
by going from the  
the survey, the  
we then passed  
survey on the  
mild stable  
of the stock  
the stock  
established a stone  
the center and  
to the 5th of the  
established a stone  
between the center  
to the 5th of the  
the 5th of the  
I hereby certify  
and attest  
my on above data  
in witness whereof  
and seal



Dec. 17<sup>th</sup>  
1907

Notice having been given in the Bloomington Star we met pursuant thereto and organized by qualifying Derwin Willis, Newton Adams, chairmen, Joseph Dunnean, Arthur Eades flagmen we then proceeded to make the following survey in section 36 T 8 R 1 W. as per plat and notes established a stone 20 rods West of the North  $\frac{1}{2}$  m.p. witnessed by Beech 7 in N 39° W 20 lks, Beech 3 in S 27° E 25  $\frac{1}{2}$  lks established a stone at the  $\frac{1}{2}$  distance between the center and N  $\frac{1}{2}$  m.p. of said section witnessed by Oak 5 in S 14° E 9 lks Oak 4 in S 13  $\frac{1}{2}$ ° W 10  $\frac{1}{2}$  lks established a stone 20 rods W. of the  $\frac{1}{2}$  distance between the center and N  $\frac{1}{2}$  m.p. witnessed by Oak 5 in S 83  $\frac{1}{2}$ ° E 7 lks Oak 4 in N 36  $\frac{1}{2}$ ° E 12  $\frac{1}{2}$  lks Oak 2 in N 1  $\frac{1}{2}$ ° E 14 lks

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe  
In witness whereof I attach my hand and seal

C. M. Bowers